

PR()TECT®

3

ANTIMICROBIAL SURFACE

This collection is made with the exclusive antimicrobial Protect technology



with MICROBAN

PR()TECT®

Antimicrobial floor and wall coverings with the highest performance



POWERFUL ACTION

resists microbes and inhibits their growth



CONTINUOUS PROTECTION

always active, 24 hours a day, with and without sunlight



TERNAL FEFECTIVENESS

thanks to the technology permanently integrated into the product







The rhythm of design, reimagined



Building on the dynamic energy and versatility of the original

Panaria Ceramica proudly presents Playlist+, the warmly anticipated reprise of our Playlist collection. Building on the dynamic energy and versatility of the original, Playlist+ offers a selection of 8 captivating colors that coordinate with Playlist in a new, larger 12x24 format, allowing you to explore even greater design possibilities.





Play with pattern, dance with possibility



An extended collection, unlimited expression


Inspired by the rhythms of modern life and the eclectic spirit of music genres, Playlist+ continues to celebrate the intersection of color, pattern, and creativity. With its classic 12x24 format, Playlist+ offers a resounding canvas for your design expressions. This size is perfect for creating expansive visual impact, whether in residential or commercial spaces. Additionally, a 36-piece mosaic option is available, providing a tonal, textural element to your designs.









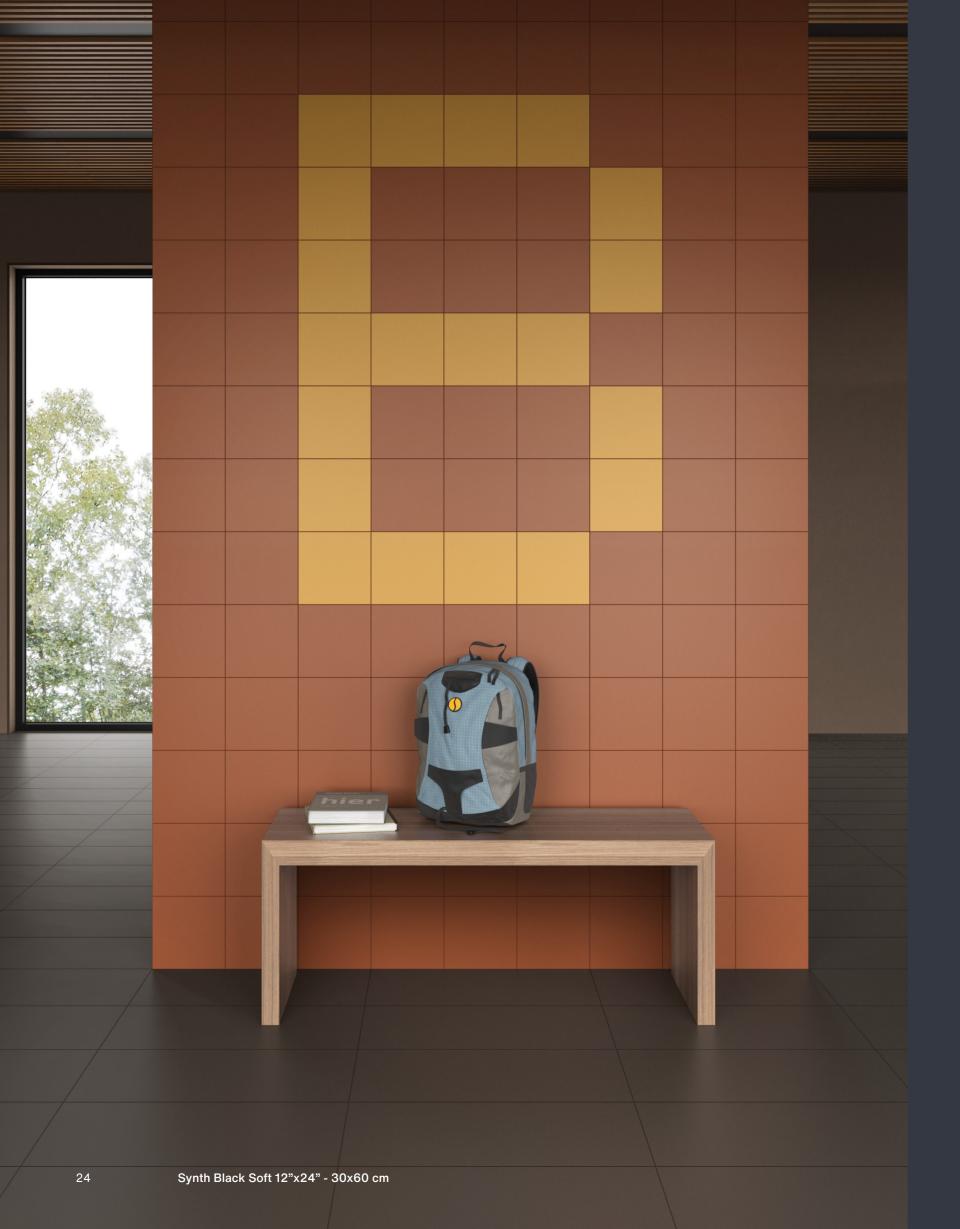


Elevate your space with a statement that's bold, vibrant, and uniquely you

Explore the extended possibilities with Playlist+ by Panaria Ceramica. Elevate your space with a collection that's as complementary, versatile, and bold as your design ambitions.





The final note is yours to play—bring your vision to life with Playlist+

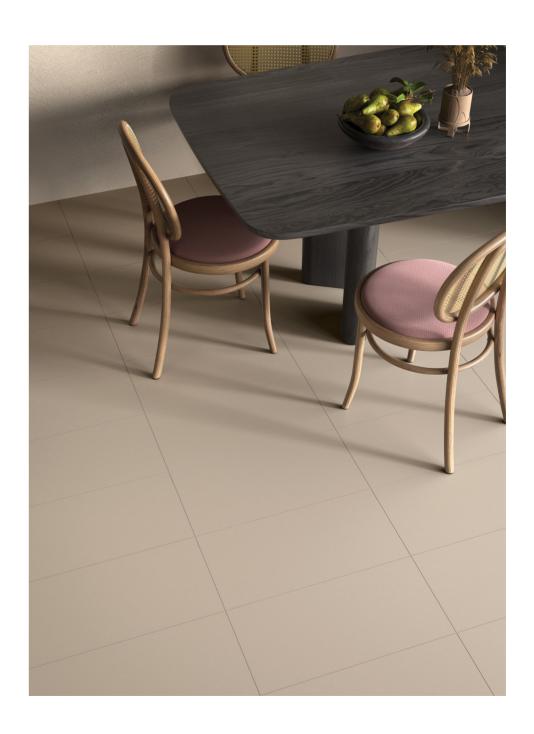

Appendix —

30

COLOURED-BODY PORCELAIN STONEWARE

INTENDED USE: SOFT 🛍 📥

AMBIENT WHITE



12"x24" - 30x60 cm SOFT

CLASSICAL BEIGE



12"x24" - 30x60 cm SOFT

Playlist+

COLOURED-BODY PORCELAIN STONEWARE

INTENDED USE: SOFT 🗂 📥

GRUNGE GREIGE



12"x24" - 30x60 cm ₹8 mm


GOTHIC GREY



12"x24" - 30x60 cm


FLOOR VIEW



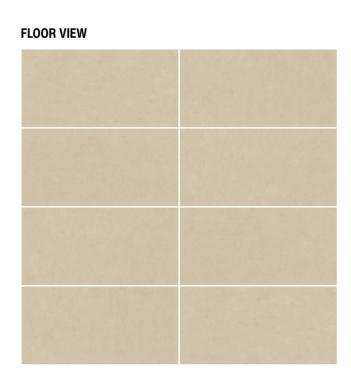




FLOOR VIEW



COLOURED-BODY PORCELAIN STONEWARE

INTENDED USE: SOFT 🛍 📥

FOLK GREEN



12"x24" - 30x60 cm

NEW-AGE TERRACOTTA



12"x24" - 30x60 cm

Playlist+

COLOURED-BODY PORCELAIN STONEWARE


INTENDED USE: SOFT 🗂 📥

RHYTHM AND BLUES




12"x24" - 30x60 cm ₹8 mm


SYNTH BLACK



12"x24" - 30x60 cm

FLOOR VIEW






FLOOR VIEW



FLOOR VIEW




COLOURED-BODY PORCELAIN STONEWARE

INTENDED USE: SOFT

DECOS




36 PC MOSAIC AMBIENT WHITE 12"x12" Rect - 30x30 cm SOFT ₹ 8 mm




36 PC MOSAIC FOLK GREEN 12"x12" Rect - 30x30 cm SOFT ₹ 8 mm




36 PC MOSAIC CLASSICAL BEIGE 12"x12" Rect - 30x30 cm SOFT ₹8 mm



36 PC MOSAIC NEW-AGE TERRACOTTA 12"x12" Rect - 30x30 cm SOFT ₹8 mm




36 PC MOSAIC GRUNGE GREIGE 12"x12" Rect - 30x30 cm SOFT ₹8 mm



36 PC MOSAIC RHYTHM AND BLUES 12"x12" Rect - 30x30 cm SOFT ₹8 mm



36 PC MOSAIC GOTHIC GREY 12"x12" Rect - 30x30 cm SOFT ₹8 mm



36 PC MOSAIC SYNTH BLACK 12"x12" Rect - 30x30 cm ₹8 mm

TRIM PIECES



BULLNOSE 4"x24" - 10x60 cm SOFT 🛨 8 mm

All colors available

Playlist+

COLOURED-BODY PORCELAIN STONEWARE

TECHNICAL FEATURES

GLAZED PORCELAIN STONEWARE according to ANSI A137.1 (Glazed Porcelain Tiles - P1 Class)

CHNICAL FEATURES	TEST METHOD	REQUIRED VALUES	AVERAGE VALUES	
<u></u>			AVERAGE VALUES	
WATER ABSORPTION	ASTM C373	≤ 0.5%	CONFORMS	
BREAKING STRENGTH	ASTM C648	≥ 250 lbf	≥350 lbf	
SURFACE ABRASION RESISTANCE	ASTM C1027	As indicated by manufacturer	PEI 3	
LINEAR THERMAL EXPANSION	ASTM C372	Not Required	α ≤ 4.4 x 10 ⁶ °F¹	
STAIN RESISTANCE	ASTM C1378	As indicated by manufacturer	AS REPORTED	
CHEMICAL RESISTANCE ^(*)	ASTM C650	As indicated by manufacturer	AS REPORTED	
FROST RESISTANCE	ASTM C1026	No sample must show visible signs.	CONFORMS	
BOND STRENGTH	ASTM C482	≥ 50 PSI	CONFORMS	
SLIP RESISTANCE	ANSI A326.3	Porcelain A326.3	IW+ Interior, Wet Plus	
SHADE VARIATION	ANSI A137.1	As indicated by manufacturer	V2 (Slight Variation)	
FLAME SPREAD	ASTM E84	-	Class A	
THERMAL CONDUCTIVITY	EN 12524	-	λ = 1,3 W/m °K / 0.7 BTU/ft h °F	
RECOMMENDED MINIMUM JOINT**	NOT RECT (INDOOR)	-	3/16" - 4.7 mm approx.	
THICKNESS	SIZES			
Τ	12"x24" - 30x60 cm	-	8 mm	

PACKINGS AND WEIGHTS

SIZES	SF / CTN	PIECES / CTN	CTN / PALLET	SF / PALLET	LBS / CTN	LBS / PALLET
12"x24" Soft	18.00	9	32	576.00	59.10	1,941
36 PC MOSAIC 12"x12" Soft	4.84	5	90	436.05	15.10	1,409
BULLNOSE 4"x24" Soft	9.82	16	60	589.20	33.80	2,078

The colors of Playlist+ complement select colors of the Playlist collection.

37 36

^(*) Excluding hydrofluoric acid and its derivatives.

(**) Grout Joint Recommendations. Per TCNA Handbook, the minimum required joint width for ceramic tile and natural stone is 1/16th. Setting ceramic or stone without a grout joint of a least 1/16", often referred to as a butt joint, does not provide sufficient accommodation for dynamic building movement, differential thermal expansion, or allowable variation in fabrication or manufacturing.

COLOURED-BODY PORCELAIN STONEWARE

INTENDED USE

KEY



Kitchens, bathrooms, living rooms and other residential environments.



Offices offices open to the general public waiting rooms, shops, public bathrooms, common apartment block areas, restaurant dining rooms, car showrooms, bars, cinemas, surgeries/clinics, hotel rooms and bathrooms.



Common areas of shopping centres, hotel fovers. canteens, fast food restaurants, dance clubs, hospitals, schools, museums, places of worship, airports, stations,



Mainly for external areas that require flooring with anti-slip characteristics.

CERTIFICATIONS

















ENVIRONMENTAL PRODUCT DECLARATION This Environmental Product Council of North America



MEMBER

MENDED card is available on request.

PANARIA CERAMICA is a member of the U.S. Green Building

Council: this is an organisation that promotes buildings that are environmentally responsible, profitable and healthy places to live and work.



GREENGUARD CERTIFICATION



PANARIA AND THE ENVIRONMENT



100% REUSE OF UNFIRED TILES

Crude waste generated by the process is reintegrated in the production cycle with no costs for the environment. This contributes to the safeguard of natural resources.



100% REUSE/RECYCLING OF THE INDUSTRIAL WASTE - FIRED TILES

The waste-fired tiles are fully reused in the production cycle. In addition, at the end of life, the tiles Panaria can be recycled as materials for substrates for roads and buildings, thus reducing the use of gravel and natural aggregates commonly used in building.



100% WATER RECYCLING

The water used in the production process is recycled. The water demand is strongly reduced by this mean.



PANARIA PACKING MATERIAL IS 100% RECYCLABLE

 $Carton\ boxes,\ plastic\ packaging\ materials,\ wooden\ pallets,\ straps,\ etc.$



100% OF NON CERAMIC WASTE

Is differentiated and recycled in other production cycles.



SAFETY REQUIREMENTS: NO FIRE REACTION

All of Panaria's ceramic tile products are Class A building materials as described in ASTM E84 -Standard Test Method for Surface Burning Characteristics of Building Materials. This is due to the flame spread rating of (0) and smoke developed rating of (0) falling within the ranges of a Class A material. Other building codes refer to this as a Type I material in accordance with NFPA 255.



METHANE CONSUMPTION IS HIGHLY REDUCED

By the use of up to date technologies and customized installations.



LOW EMISSIONS IN THE ATMOSPHERE

Panaria production plant strictly complies to US Standards with a very small amount of gas emissions in the atmosphere.

Follow us on









Group Marketing & Communications - Panariagroup August 2025



